


# Dry Box


Typ: WK 7,3 MI1 STG Steel cassette side walls (galvanized)



## Dry Box with clinched side walls

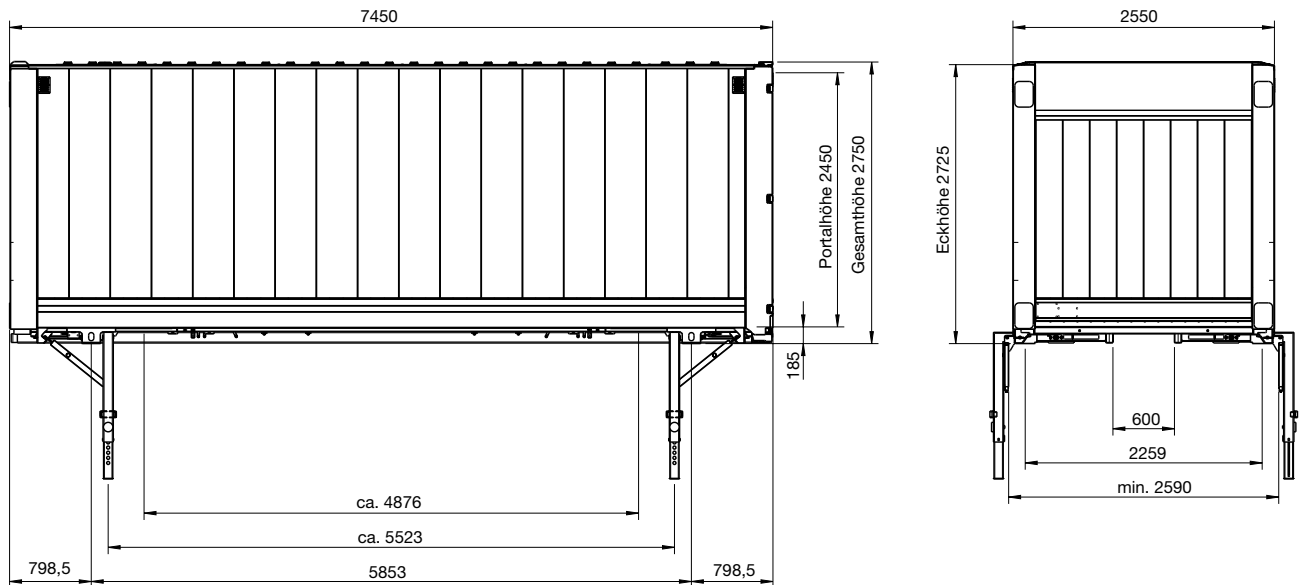

## Rear view of container doors

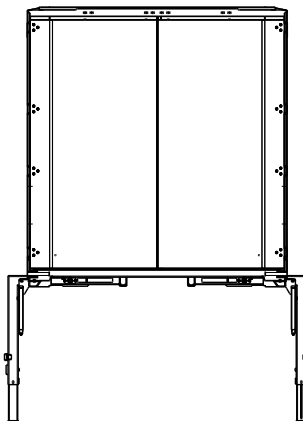

## Technical description

185 mm high floor assembly incl. floor, with bottom guide tunnel; 4 container corner fittings on 20' base, symmetrical overhangs; 4 grapple bars; rear pull out ladder and retaining strap for rear access; horizontal steel collision protection on rear profile, left and right

4 laterally extendable/folding support legs, 2-fold secured; support legs with reflectors glued to the front (reflectors point forwards when parked); support leg lock can be operated from the outside

27 mm thick plywood floor, fully waterproofed and sealed, resistance test according to EN 283, for floor loadings up to 5.460 kg forklift axle load; 2 ventilation slots at front in the floor (according to GGVS)

Profiled roof with steel trapezium sheets, height: 25 mm

Closed superstructure; smooth side walls made of galvanised sheet steel cassettes; 2 ventilation vents per side wall; forklift collision protection inside, 3-sided, approx. 360 mm high

Profiled roof with steel trapezium sheets, height: 25 mm

Smooth front wall made of galvanised sheet steel cassettes; inside with wooden covering; lower panel as replaceable impact protection; front wall outside with offset at the top (optimised for driving around curves)

Rear wall as steel container door with replaceable seal (width inside approx. 2,470 mm); internal door locks (door smooth on the outside), operation underneath the door; door retainer as reinforced chain

Customs seal, customs plate

Steel parts are shot blasted, KTL primed with zinc phosphating and powder-coated; 1-colour standard paint finish; grapple pockets in contrasting colours in contrasting color; support legs in black

Technical data	Standard	Option
Type:	<b>WK 7,3 MRI STG</b>	WK 7,7 MRI STG
Perm. total weight:	<b>16,000 kg</b>	16,000 kg
Tare weight, approx.:	<b>2,950 kg</b>	3,050 kg
Internal length:	<b>7,320 mm</b>	7,690 mm
Internal width:	<b>2,480 mm</b>	2,480 mm
Total length:	<b>7,450 mm</b>	7,820 mm
Height of floor assembly, including floor:	<b>185 mm</b>	185 mm
Internal height:	<b>2,530 mm</b>	2,530 mm
Clear portal height:	<b>2,450 mm</b>	2,450 mm
Corner height:	<b>2,725 mm</b>	2,725 mm
Total height:	<b>2,750 mm</b>	2,750 mm
Landing height:	<b>1,320 mm</b>	1,320 mm

(Dimensions and weights for standard units)



Fahrzeugwerk Bernard KRONE GmbH & Co. KG  
Bernard-Krone-Straße 1, 49757 Werlte, GERMANY  
Phone: +49 (0) 5951 209-0, Fax: +49 (0) 5951 209-98-268

Subject to modifications!  
VF/Beu issue 11/2024